BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Name of the work: **Estimate for Improvements and Ashalting to roads at Srinidhi layout and Balaji layout in ward No 09 in Vidyaranyapura sub Division.**

							Estimate Cost:		2000000.00
Sl. No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
1	KSRRB 300-2. Earth work excavation by manual means in Hard soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications complete as per specifications MORTH chapter 3. **Page No. 152 / Item No. 19.2/ PWD SR 2013-14**	Cum							
	Desilting of Drains								
	Srinidhi Layout 8th B, C & D Cross		6	100.00	0.45	0.45	121.50		
	Main Road		2	190.00	0.45	0.40	68.40		
	Cross Road		2	117.00	0.45	0.35	36.86		
	Berm Cutting								
	Srinidhi Layout 8th B, C & D Cross		6	100.00	1.20	0.25	180.00		
	Main Road		2	190.00	1.20	0.25	114.00		
	Cross Road		2	117.00	1.15	0.25	67.19		
							587.95	90.72	**53338.00**
	Basic Rate	84.00							
	Area Weightage @8%	6.72							
	Total	**90.72**							
2	Removing B.S. Slab Drain and stacking **(P.28 / I.5.32 PWD SR - 2013-14)**	Sqm							
	Srinidhi Layout 8th B, C & D Cross		6	65.00		1.35	526.50		
	Main Road		2	95.00		1.35	256.50		
			2	20.00		1.35	54.00		
							837.00	50.11	**41944.00**
	Basic Rate	46.40							
	Area Weightage @8%	3.71							
	Total	**50.11**							
3	Refixing stone slabs of drains and pointing in CM (1:3) **(P. 28 / I. 5.33 PWD SR - 2013-14)**	Sqm							
				Vide Item No.2			**837.00**	70.04	**58622.00**
	Basic Rate	64.85							
	Area Weightage @ 8%	5.19							
	Total	**70.04**							
4	KSRRB 300-45: Scarifying stone metal crust 50mm to 100mm thick with pick axes along with premix carpet/surface dressing and stacking of old serviceable materials within a lead of 100 meters by manual means including cost of all labour charges complete as per specifications. MORTH chapter 3, **No. 158 / Item No. 19.51 / PWD SR 2013-14**	Sqm							

	Description	Unit	No.	L	B	D	Qty	Rate	Amount
	Srinidhi Layout 8th B, C & D Cross		3	100.00	6.00		1800.00		
	Main Road		1	190.00	5.80		1100.00		
	Cross Road		1	117.00	4.50		525.00		
							3425.00	40.50	**138713.00**
	Basic Rate	37.50							
	Area Weightage @ 8%	3.00							
	Total	**40.50**							
5	Providing, laying, spreading and compacting graded stone aggregate to **wet mix macadam** specification including premixing the Material with water at OMC in mechanical mix plant carriage of mixed Material by tipper to site, laying in uniform layers with paver in sub-base / base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per specifications **(P. 170 / I. 20.18) PWD SR - 2013-14.**	Cum							
	Srinidhi Layout 8th B, C & D Cross		3	100.00	6.00	0.15	270.00		
	Main Road		1	190.00	5.80	0.15	165.00		
	Cross Road		1	117.00	4.50	0.15	78.75		
							513.75	1121.04	**575934.00**
	Basic Rate	1038.00							
	Area Weightage @ 8%	83.04							
	Total	**1121.04**							
6	KSRRB 500-1 : Cleaning the existing WBM road surface including removing of binding materials and other foreign matter with wire bushes and small picks, sweeping with brooms or soft brushes and finally dusting with old gunny bags and / or compressed air to receive bituminous treatment including cost of all materials, labour, HOM of machineries, curing complete as per specifications. Specification No. 500-1.3 **(P. 175 / I. 21.1) PWDSR 2013-14**	Sqm							
	Srinidhi Layout 8th B, C & D Cross		3	100.00	6.00		1800.00		
	Main Road		1	190.00	5.80		1100.00		
	Cross Road		1	117.00	4.50		525.00		
							3425.00	10.53	**36065.00**
	Basic Rate	9.75							
	Area Weightage @ 8%	0.78							
	Total	**10.53**							
7	KSRRB M500-6: Providing and applying primer coat with bitumen emulsion on prepared surface of granular base including clearing of road surface and spraying primer at the rate of 0.60 kg / sqm using mechanical means complete as per specifications. MORTH specification NO. 502, **Page No. 175 / Item No. 21.6 / PWD SR 2013-14**	Sqm							
			Qty Vide Item No. 6				3425.00		
							3425.00	44.28	**151659.00**

	Description	Unit	No.	L	B	D	Qty	Rate	Amount
	Basic Rate	41.00							
	Area Weightage @ 8%	3.28							
	Total	**44.28**							
8	KSRRB M500-18: Providing and laying **semi dense bituminous concrete** 25mm thick with 100-120 TPH batch type HMP producing an average output of 75 tonnes per hour using crushed aggregates of specified grading, premixed with bituminous binder at 4.5 to 5% of mix and filler, transporting the hot mix to work site, laying with a hydrostatic paver finisher with sensor control to the required grade, level and alignment, rolling with smooth wheeled, vibratory and tandem roller to achieve the desired compaction as per MORTH specifications clause No. 500.8 complete in all respects as per specifications. **With 80/100 grade bitumen, No. 178 / Item No. 21.20.1 / PWD SR 2013-14**	Cum							
	Srinidhi Layout 8th B, C & D Cross		3	100.00	6.00	0.025	45.00		
	Main Road		1	190.00	5.80	0.025	27.50		
	Cross Road		1	117.00	4.50	0.025	13.13		
							85.63	9631.44	**824740.00**
	Basic Rate	8918.00							
	Area Weightage @ 8%	713.44							
	Total	**9631.44**							
9	KSRRB M800-13: Road marking with hot applied thermoplastic compound with reflect rising glass beads on bituminous surface- providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorising glass beads at 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface to level, uniform and free from streaks and holes complete as per specifications. MORTH specification No. 803, **No. 197 / Item No. 24.15 PWD SR 2013-14**	Sqm							
			6	100.00	0.10		60.00		
			2	190.00	0.10		38.00		
			2	100.00	0.10		20.00		
							118.00	471.96	**55691.00**
	Basic Rate	437.00							
	Area Weightage @ 8%	34.96							
	Total	**471.96**							
10	Lead for Disposal of Debris shall be payable at carriage rates by Mechanical means inlcuding loading and unloading. From 0.00 to 2.00 Km (Page No.123)	Cum							
			Vide Item No. 1				**587.95**	72.71	**42747.00**
	Average weight of earth 1.28 tonne / kg for 2X1.28X2.00=5.12	5.12							

	Description	Unit	No.	L	B	D	Qty	Rate	Amount
	dd loading and unloading Vide item no.17.1 P.no.141	62.20							
		67.32							
	Area Weightage @ 8%	5.39							
	Total	**72.71**							
11	For Third Party QC Charges @ 1% on Estimate Cost								**20000.00**
12	Miscellaneous and other Charges	L/S							**594.00**
								Total	**2000000.00**
	(Rs. Twenty Lakhs Only)								

CERTIFICATE:

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per P.W.D S.R of 2013-14.
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.

Assistant Engineer
W-09

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Vidyaranyapura Sub Division

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Division

ADMINISTRATIVELY SANCTIONED for Rs. 20.00 lakhs
Rupees Twenty lakhs only
Under P2654.
Registered
Subject : Sanction order.
enclosed memo EE ( ) No. /...
Dt
Add. Comm (As) / 635 / 13-14
dated 23/12/13 for Rs. 20.00 lakhs

Addl. Commissioner
(Yelahanka Zone)
B.B.M.P. Bengaluru-92

Technical Sanction for Rs. 20.00 lakhs
Twenty lakhs only
EE / BTP / 162 / 12-13, 23 / 12 / 12.
Dt

Executive Engineer
Byatarayanapura Division
Yelahanka Zone, B.B.M.P.
Bangalore - 560 092

BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE, BYATARAYANAPURA DIVISION

Lead Statement for Srinivaspura Dumping Yard for Ward No. 09, Vidyaranyapura Sub Division.

Lead Distance

1.	From BBMP Sub Division office to Devi Circle	1.50 Kms
2.	From Devi Circle to Thirumala Daba	2.00 Kms
3.	From Thirumala Daba to 3rd Cross SBI Bank	2.00 Kms
4.	From 3rd Cross SBI Bank to Sheshadripuram College	0.50 Kms
5.	From Shesadripuram College to Police Station	0.80 Kms
6.	From Police Station to Kogilu Cross	0.60 Kms
7.	From Kogilu Cross to Srinivasapura	4.00 Kms
8.	From Srinivasapura to Dumping Yard	0.50 Kms
	Total	**11.90 Kms**

Certificate:

1. Certified that the Srinivasapura Dumping Yard us the approved dumping yard for ward no. 09 BBMP
2. BBMP Sub Division office Vidyaranyapura is taken as the centre place for calculating the lead distance for ward no. 09.
3. The above distance is the shortest distance for calculating the lead.

Assistant Engineer
Ward No. 09

Assistant Executive Engineer
Vidyaranyapura Sub Division

Executive Engineer
Byatarayanapura Division
16/12/2013

LOAD CHART FOR DUMPING YARD FOR WARD NO 09

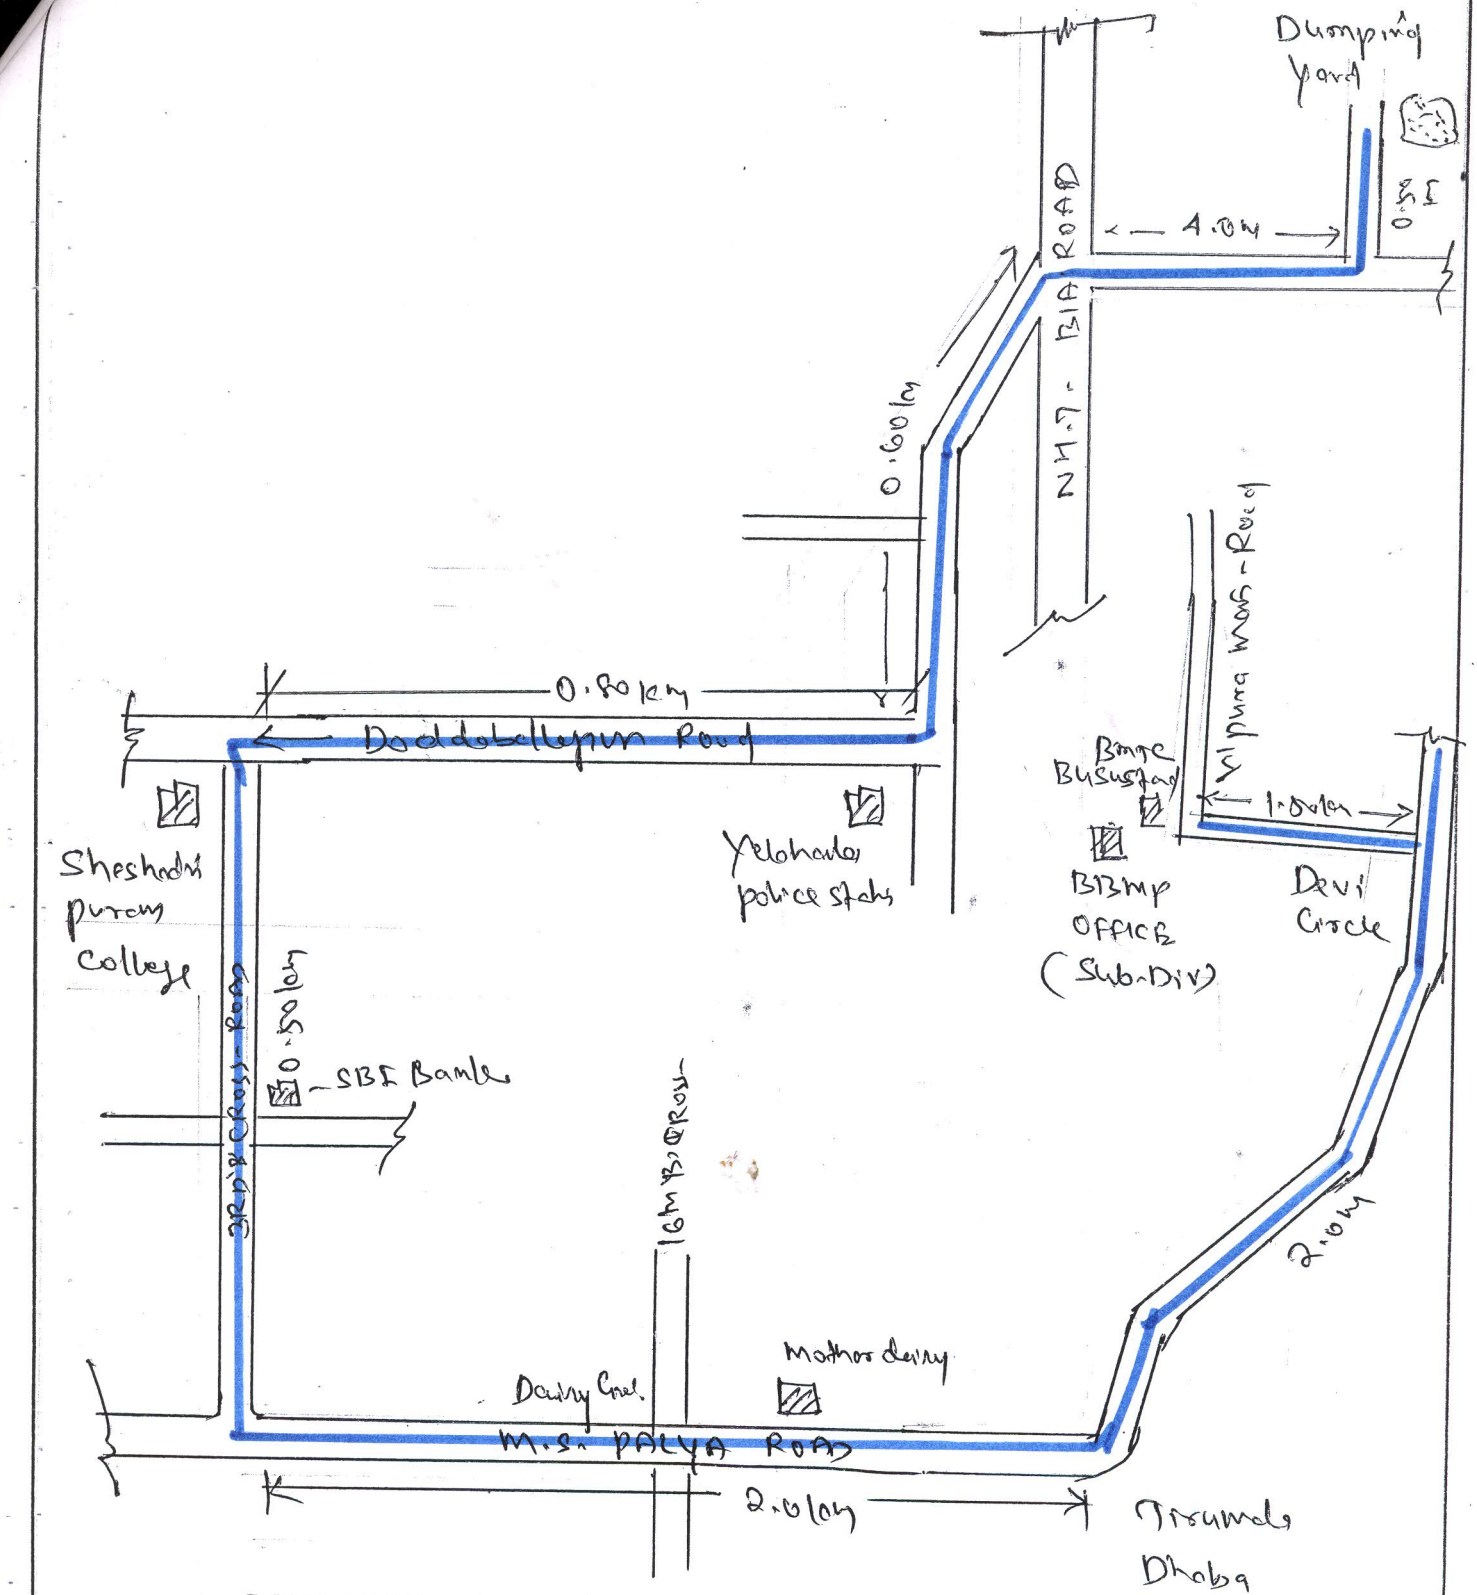

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು.
ವಿದ್ಯಾರಣ್ಯಪುರ ಉಪ ವಿಭಾಗ
ಯಲಹಂಕ ವಲಯ,
ಬಿ. ಬೆಂ. ಮ ಪಾ., ಬೆಂಗಳೂರು-97

Name of Work: Improvements and Asphalting to Roads at Srinidhi Layout and Balaji Layout in Ward No. 09, Vidyaranyapura Sub Division.

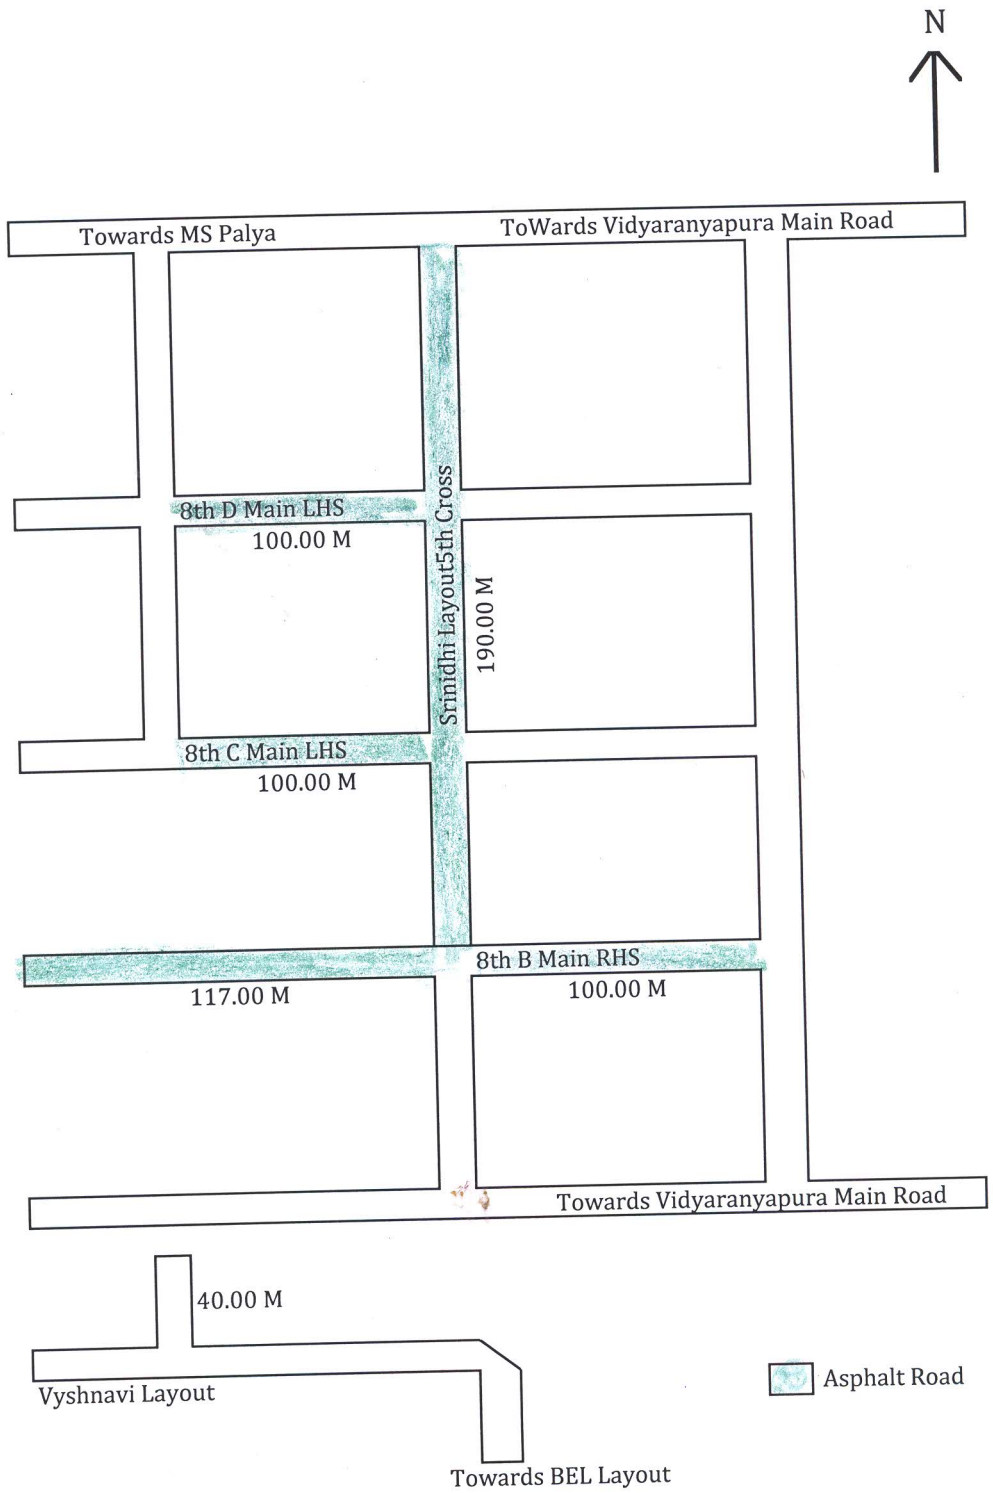

Assistant Engineer
Ward No. 09

Assistant Executive Engineer
Vidyaranyapura Sub Division